

Lecture Notes in Computer Science

The LNCS series reports state-of-the-art results in computer science research, development, and education, at a high level and in both printed and electronic form. Enjoying tight cooperation with the R&D community, with numerous individuals, as well as with prestigious organizations and societies, LNCS has grown into the most comprehensive computer science research forum available.

The scope of LNCS, including its subseries LNAI and LNBI, spans the whole range of computer science and information technology including interdisciplinary topics in a variety of application fields. The type of material published traditionally includes

- proceedings (published in time for the respective conference)
- post-proceedings (consisting of thoroughly revised final full papers)
- research monographs (which may be based on outstanding PhD work, research projects, technical reports, etc.)

More recently, several color-cover sublines have been added featuring, beyond a collection of papers, various added-value components; these sublines include

- tutorials (textbook-like monographs or collections of lectures given at advanced courses)
- state-of-the-art surveys (offering complete and mediated coverage of a topic)
- hot topics (introducing emergent topics to the broader community)

In parallel to the printed book, each new volume is published electronically in LNCS Online.

Detailed information on LNCS can be found at www.springer.com/lncs

Proposals for publication should be sent to
LNCS Editorial, Tiergartenstr. 17, 69121 Heidelberg, Germany
E-mail: lncs@springer.com

ISSN 0302-9743

ISBN 978-3-540-74811-3



9 783540 748113

Lecture Notes in
Computer Science

LNCS

LNAI

LNBI

LNCS 4715

Jörg M. Haake
Sergio F. Ochoa
Alejandra Cechich (Eds.)

Groupware: Design, Implementation, and Use

13th International Workshop, CRIWG 2007
Bariloche, Argentina, September 2007
Proceedings

 springer.com

 Springer

Jörg M. Haake Sergio F. Ochoa
Alejandra Cechich (Eds.)

Groupware: Design, Implementation, and Use

13th International Workshop, CRIWG 2007
Bariloche, Argentina, September 16-20, 2007
Proceedings

 Springer

Ulrich Hoppe, University of Duisburg, Germany
Ned Kock, Texas A&M International University, USA
Gwendolyn Kolfshoten, Delft University of Technology, The Netherlands
Filippo Lanubile, University of Bari, Italy
Stephan Lukosch, FernUniversität in Hagen, Germany
Gloria Mark, University of California, Irvine, USA
Alejandra Martínez, Universidad de Valladolid, Spain
Sonia Mendoza, CINVESTAV-IPN, Mexico
Alberto Morán, UABC, Mexico
Bjørn Erik Munkvold, Agder University College, Norway
Leandro Navarro, Polytechnic University of Catalonia, Spain
Miguel Nussbaum, Pontificia Universidad Católica de Chile, Chile
Álvaro Ortigoza, Universidad Autónoma de Madrid, Spain
Yvan Peter, University of Lille 1, France
José A. Pino, Universidad de Chile, Chile
Steven Poltrock, Boeing, USA
Atul Prakash, University of Michigan, USA
Nuno Preguiça, Universidade Nova de Lisboa, Portugal
Alberto Raposo, Catholic University of Rio de Janeiro, Brazil
Christoph Rensing, Technische Universität Darmstadt, Germany
Flávia Santoro, Universidade Federal do Estado do Rio de Janeiro, Brazil
Choon Ling Sia, University of Hong Kong, Hong Kong
Guillermo Simari, Universidad Nacional del Sur, Argentina
Carla Simone, University of Milan, Italy
Till Schümmer, FernUniversität in Hagen, Germany
Ralf Steinmetz, Technische Universität Darmstadt, Germany
Julita Vassileva, University of Saskatchewan, Canada
Aurora Vizcaíno-Barceló, Universidad de Castilla-La Mancha, Spain
Juergen Vogel, European Media Laboratory GMBH, Germany
Jacques Wainer, State University of Campinas, Brazil
Martin Wessner, Ludwig Maximilian University of Munich, Germany
Volker Wulf, Fraunhofer FIT, Germany
Ilze Zigurs, University of Nebraska at Omaha, USA

Doctoral Colloquium Chairs

Pedro Antunes, Universidade de Lisboa, Portugal
Alejandro Fernández, Universidad Nacional de La Plata, Argentina

Organizing Committee Chair

Alejandra Cechich (Local Chair), Comahue National University, Argentina

Organizing Committee

Silvia Amaro, Comahue National University, Argentina
Gabriela Aranda, Comahue National University, Argentina
Agustina Buccella, Comahue National University, Argentina
Andrés Flores, Comahue National University, Argentina
Adriana Martín, Comahue National University, Argentina
Nadina Martínez, Comahue National University, Argentina
Andrés Neyem, Universidad de Chile, Chile

Jörg M. Haake
FernUniversität in Hagen
Department of Mathematics and Computer Science
Universitätsstr. 1, 58084 Hagen, Germany
E-mail: joerg.haake@fernuni-hagen.de

Sergio F. Ochoa
Universidad de Chile
Department of Computer Science
Av. Blanco Encalada, 2120, Santiago, Chile
E-mail: sochoa@dcc.uchile.cl

Alejandra Cechich
Universidad Nacional del Comahue
Computing Sciences Department
Buenos Aires 1400, 8300 Neuquén, Argentina
E-mail: achechich@uncoma.edu.ar

Library of Congress Control Number: 2007934512

CR Subject Classification (1998): H.5.2, H.5.3, H.5, K.3.1, K.4.3, C.2.4

LNCS Sublibrary: SL 3 – Information Systems and Application, incl. Internet/Web and HCI

ISSN 0302-9743
ISBN-10 3-540-74811-3 Springer Berlin Heidelberg New York
ISBN-13 978-3-540-74811-3 Springer Berlin Heidelberg New York

This work is subject to copyright. All rights are reserved, whether the whole or part of the material is concerned, specifically the rights of translation, reprinting, re-use of illustrations, recitation, broadcasting, reproduction on microfilms or in any other way, and storage in data banks. Duplication of this publication or parts thereof is permitted only under the provisions of the German Copyright Law of September 9, 1965, in its current version, and permission for use must always be obtained from Springer. Violations are liable to prosecution under the German Copyright Law.

Springer is a part of Springer Science+Business Media
springer.com

© Springer-Verlag Berlin Heidelberg 2007
Printed in Germany

Typesetting: Camera-ready by author, data conversion by Scientific Publishing Services, Chennai, India
Printed on acid-free paper SPIN: 12120192 06/3180 5 4 3 2 1 0

Preface

This volume constitutes the proceedings of the 13th International Workshop on Groupware (CRIWG 2007). The conference was held in Spain (Medina del Campo) in 2006, Brazil (Porto de Galinhas) in 2005, Costa Rica (San Carlos) in 2004, France (Autrans) in 2003, Chile (La Serena) in 2002, Germany (Darmstadt) in 2001, Portugal (Madeira Island) in 2000, Mexico (Cancun) in 1999, Brazil (Buzios) in 1998, Spain (El Escorial) in 1997, Chile (Puerto Varas) in 1996, and Portugal (Lisbon) in 1995.

The CRIWG workshops have been motivated by advances in computer-supported cooperative work (CSCW), and by the need for CSCW to meet the challenges of new application areas. This workshop aims at providing a forum for academic researchers and professionals to exchange their experiences and their ideas about problems and solutions related to the design, development and use of groupware applications. Researchers report their ideas, models, designs and experiences to CRIWG submitting full-paper contributions to present achieved or mature works, and shorter papers to report work in progress.

CRIWG 2007 received 65 submissions from 15 different countries, 49 full papers and 16 work-in-progress papers. Each article was reviewed by at least three members of the Program Committee, using a double-blind reviewing process. Based on the reviewers' recommendations 27 papers were finally accepted: 17 full papers and 10 work-in-progress papers. These papers were grouped into six tracks: group awareness and social aspects, groupware design and development, computer-supported collaborative learning, groupware applications and studies, group negotiation and knowledge management, and groupware activities and evaluation. In addition, we are pleased to have had Jonathan Grudin from Microsoft Research, USA, as keynote speaker.

CRIWG 2007 would not have been possible without the work and support of a great number of people. First of all we want to thank the members of the Program Committee for their valuable reviews of the papers. We are grateful for the advice and support provided by the CRIWG Steering Committee. We extend a special acknowledgement to our sponsor organizations: Universidad Nacional del Comahue (Argentina), Universidad de Chile (Chile), FernUniversität in Hagen (Germany), Microsoft Research (USA) and Microsoft Chile (Chile), SADIO (Argentina).

Last, but certainly not least, we thank the attendees for their interest in CRIWG 2007. We hope they had an enriching experience at the conference.

Please get involved!

September 2007

Joerg M. Haake
Sergio F. Ochoa
Alejandra Cechich

Table of Contents

Group Negotiation and Knowledge Management

- The Gap Between Small Group Theory and Group Support System
Research 1
Joey F. George
- Alternative Dispute Resolution Based on the Storytelling Technique 15
Pedro Antunes, Sara Relvas, and Marcos Borges
- Fostering Knowledge Exchange in Virtual Communities by Using
Agents 32
*Javier Portillo-Rodríguez, Aurora Vizcaíno, Juan Pablo Soto,
Mario Piattini, and Gabriela N. Aranda*

Group Awareness and Social Aspects

- Leveraging Visual Tailoring and Synchronous Awareness in Web-Based
Collaborative Systems 40
Mohamed Bourimi, Stephan Lukosch, and Falk Kühnel
- Visualizing Shared-Knowledge Awareness in Collaborative Learning
Processes 56
*César A. Collazos, Luis A. Guerrero, Miguel A. Redondo, and
Crescencio Bravo*
- An Improved Design and a Case Study of a Social Visualization
Encouraging Participation in Online Communities 72
Julita Vassileva and Lingling Sun
- Social Theatres: A Web-Based Regulated Social Interaction
Environment 87
Hugo Paredes and F. Mário Martins

Groupware Design and Development

- The Collaboration Engineering Approach for Designing Collaboration
Processes 95
Gwendolyn L. Kolfschoten and Gert-Jan de Vreede
- A Proposal of Integration of the GUI Development of Groupware
Applications into the Software Development Process 111
A.I. Molina, W.J. Giraldo, M.A. Redondo, and M. Ortega

Coordinating Multi-task Environments Through the Methodology of Relations Graph	127
<i>Adailton A. Cruz, Léo P. Magalhães, Alberto B. Raposo, Rafael S. Mendes, and Dennis G. Pelluzi</i>	
Fostering Groupware Tailorability Through Separation of Concerns	143
<i>Diego Torres, Alejandro Fernandez, Gustavo Rossi, and Silvia Gordillo</i>	
An Approach to the Model-Based Design of Groupware Multi-user Interfaces	157
<i>María Luisa Rodríguez, José Luis Garrido, María V. Hurtado, and Manuel Noguera</i>	
Computer Aided Pattern-Based Collaboration Process Design: A Computer Aided Collaboration Engineering Tool	165
<i>Gwendolyn L. Kolfshoten, Gert-Jan de Vreede, and Robert O. Briggs</i>	
Designing Mobile Shared Workspaces for Loosely Coupled Workgroups	173
<i>Andrés Neyem, Sergio F. Ochoa, and José A. Pino</i>	
A Decentralized Middleware for Groupware Applications	191
<i>Pablo Gotthelf, Alejandro Zunino, and Marcelo Campo</i>	

Computer Supported Collaborative Learning (CSCL)

Modelling Shared Knowledge and Shared Knowledge Awareness in CSCL Scenarios Through Automated Argumentation Systems	207
<i>María Paula González, Carlos Iván Chesñevar, César A. Collazos, and Guillermo R. Simari</i>	
Deployment of Ontologies for an Effective Design of Collaborative Learning Scenarios	223
<i>Seiji Isotani and Riichiro Mizoguchi</i>	
Dynamic and Flexible Learning in Distributed and Collaborative Scenarios Using Grid Technologies	239
<i>Andreas Harrer, Adam Lucarz, and Nils Malzahn</i>	
Directions to Acknowledge Learners' Self-organization in CSCL Macro-scripts	247
<i>Pierre Tchounikine</i>	

Groupware Applications and Studies

Supporting Informal Co-located Collaboration in Hospital Work	255
<i>David A. Mejia, Alberto L. Morán, and Jesus Favela</i>	

Relating Interactions to Artifacts Through Content Analysis: A Practical Investigation	271
<i>Adriana S. Vivacqua, Jano M. de Souza, and Jean-Paul Barthès</i>	
Studying the Impact of Personality and Group Formation on Learner Performance	287
<i>Víctor Sánchez Hórreo and Rosa M. Carro</i>	
Transferring a Collaborative Work Practice to Practitioners: A Field Study of the Value Frequency Model for Change-of-Practice	295
<i>Robert O. Briggs, Alanah J. Davis, John D. Murphy, Lucas Steinhauser, and Thomas F. Carlisle</i>	

Groupware Activities and Evaluation

An Agent-Based Recommender System to Support Collaborative Web Search Based on Shared User Interests	303
<i>Daniela Godoy and Analía Amandi</i>	
How to Choose Groupware Tools Considering Stakeholders' Preferences During Requirements Elicitation?	319
<i>Gabriela N. Aranda, Aurora Vizcaíno, Alejandra Cechich, and Mario Piattini</i>	
Evaluation Methods for Groupware Systems	328
<i>Valeria Herskovic, José A. Pino, Sergio F. Ochoa, and Pedro Antunes</i>	
Activity-Aware Computing in Mobile Collaborative Working Environments	337
<i>Monica Tentori and Jesus Favela</i>	
Author Index	355

Fostering Knowledge Exchange in Virtual Communities by Using Agents

Javier Portillo-Rodríguez, Aurora Vizcaíno, Juan Pablo Soto,
Mario Piattini, and Gabriela N. Aranda

Alarcos Research Group,
Information Systems and Technologies Department, UCLM-Soluziona Research and
Development Institute, University of Castilla – La Mancha, Spain
Paseo de la Universidad, 4-13071, Ciudad Real, Spain
javier.portillo@uclm.es, aurora.vizcaino@uclm.es,
jpsoto@proyectos.inf-cr.uclm.es, mario.piattini@uclm.es,
garanda@uncoma.edu.ar

Abstract. Nowadays, the increase in information and in sources from which to obtain knowledge have generated a large-scale development of knowledge sharing systems. However, these systems do not always live up to the expectations of the organisations that use them, as they do not take the fundamental social aspects necessary for the flow and sharing of knowledge between the members of a community into consideration. The objective of our work is to emulate the behaviour of communities of practice, where the confidence that exists between the members of these communities leads to an exchange of knowledge. We have, therefore, designed a three-level multi-agent architecture which takes into account both the way in which a community member behaves and the community to which that member belongs.

Keywords: Knowledge Management, Multi-agent Systems, Reputation, Trust.

1 Introduction: From Communities to Communities of Practice

Intellectual capital and knowledge management are currently growing since knowledge is a critical factor for an organization's competitive advantage [1]. This growth determines organizations' performance by studying how well they manage their most critical knowledge. One important instrument in knowledge management is communities [2], [3]. Although there is no generally accepted definition, a community can be defined as a group of socially interacting people who are mutually tied to one another and regularly meet at a common place [4]. The development of Internet and groupware technologies has led to a new kind of community - "virtual communities", where members may or may not meet one another face to face and may exchange words and ideas through the use of computers networks [5].

Our research is focused upon professionally-oriented communities, which consists of company employees who communicate and share information in order to support their professional tasks. A special case of professionally-oriented communities are the

"Communities of Practice" (CoPs), defined by Wenger et al. [6] as groups of people who share a concern, a set of problems, or a passion about a topic, and who deepen their knowledge and expertise in this area by interacting on an ongoing basis.

The following section shows our proposal to support CoPs concepts by defining a Multi-Agent Architecture. In Section 3 we describe both a prototype with which to rate the architecture, and the manner in which the formulas to calculate reputation in virtual communities are defined. Finally, in Section 4 we compare our proposal with other related works.

2 Our Proposal: A Multi-agent Architecture to Support CoPs

In order to support concepts related to CoPs and Knowledge Management, we have designed a three level multi-agent architecture.

We have chosen the agent paradigm because it constitutes a natural metaphor for systems with purposeful interacting agents, and this abstraction is close to the human way of thinking about their own activities [7]. This foundation has led to an increasing interest in social aspects such as motivation, leadership, culture or trust [8]. Our research is related to the latter concept of "trust" since artificial agents can be made more robust, resilient and effective by providing them with trust reasoning capabilities.

The architecture is composed of Reactive, Deliberative and Social Levels and is mainly based on the concepts of trust and reputation. Trust can be defined as confidence in the ability and intention of a source of information to deliver correct information [9] and reputation as the amount of trust an agent has in a source of information, which is created through interactions with those information sources. It is important to take these concepts into account because if we wish to foster knowledge exchange in communities of practice we have to know that people in real life in general and in companies in particular, prefer to exchange knowledge with "trustworthy people" by which we mean people they trust. People with a consistently low reputation will eventually be isolated from the community since others will rarely accept their justifications or arguments and will limit their interactions with them. It is for this reason that we considered the Social Level to be an important contribution to the multi-agent architecture that we propose. The reactive and deliberative levels are considered by other authors as typical levels that a multi-agent system must have [10]. In the following paragraphs we shall describe each level of architecture in detail.

2.1 Reactive Architecture

This architecture was designed to the reactive level of the agent. The architecture must respond at the precise moment at which an event has been perceived. This architecture is formed of the following modules:

Agent's internal model: Because an agent represents a person in a community this model stores the user's features. Therefore, this module stores the following parts:

Conference Organization

Program Committee Chairs

Joerg M. Haake, FernUniversität in Hagen, Germany
Sergio F. Ochoa, Universidad de Chile, Chile

Program Committee

Mark S. Ackerman, University of Michigan, USA
Rosa Alarcón, Pontificia Universidad Católica de Chile, Chile
Roberto Aldunate, University of Illinois at Urbana-Champaign, USA
Analía Amandi, UNICEN, Argentina
Richard Anderson, University of Washington, USA
Pedro Antunes, Universidade de Lisboa, Portugal
Jaco Appelman, Delft University of Technology, The Netherlands
Nelson Baloian, Universidad de Chile, Chile
Jean-Paul Barthés, Université de Technologie de Compiègne, France
Marina Bers, Tufts University, USA
Marcos Borges, Universidade Federal do Rio de Janeiro, Brazil
Patrick Brézillon, Laboratoire LIP6, Université Paris 6, France
Robert O. Briggs, University of Nebraska at Omaha, USA
Traci Carte, University of Oklahoma, USA
César Collazos, Universidad del Cauca, Colombia
Gert-Jan de Vreede, University of Nebraska at Omaha, USA
Atanasi Daradoumis, Open University of Catalonia, Spain
Bertrand David, Ecole Centrale de Lyon, France
Alanah Davis, University of Nebraska at Omaha, USA
Dominique Decouchant, LIG Laboratory, Grenoble, France
Alicia Díaz, Universidad Nacional de La Plata, Argentina
Yannis Dimitriadis, Universidad de Valladolid, Spain
Tom Erickson, IBM T. J. Watson Research Center, USA
Jesus Favela, CICESE, Mexico
Alejandro Fernández, Universidad Nacional de La Plata, Argentina
Christine Ferraris, Université de Savoie, France
Hugo Fuks, Pontificia Universidade Católica do Rio de Janeiro, Brazil
Matt Germonprez, University of Wisconsin - Eau Claire, USA
Werner Geyer, IBM T.J. Watson Research Center, USA
Eduardo Gómez-Sánchez, Universidad de Valladolid, Spain
Víctor M. González, University of Manchester, UK
Tom Gross, Bauhaus University Weimar, Germany
Luis A. Guerrero, Universidad de Chile, Chile
Andreas Harrer, University of Duisburg-Essen, Germany

- The *interests*. This part is included in the internal model in order to make the process of distributing knowledge as fast as possible. That is, the agents are able to search for knowledge automatically, checking whether there is stored knowledge which matches its own interests. This behaviour fosters knowledge sharing and reduces the amount of work that employees have to do because they receive knowledge without having to make searches.
- The *user's profile*. This part describes the profile of the person on whose behalf the agent is acting. This module is composed of the users' preferences, expertise and position. The *Preferences* can be used to discover how the user prefers the agent to present the information to him/her. *Expertise* is the skill or knowledge of a person who knows a great deal about a specific thing. Since we are emulating virtual communities it is important to know the degree of expertise that each member of the community has in order to decide how trustworthy a piece of knowledge is, as people often trust in experts more than in novice employees. Another important piece of information considered in the user's profiles is that of *Position*, since employees often consider information that comes from a boss as being more reliable than that which comes from another employee in the same (or a lower) position as him/her [11]. Such different positions inevitably influence the way in which knowledge is acquired, diffused and eventually transformed within the local area. Because of this, in our research these factors will be calculated by taking into account a weight that can strengthen this factor to a greater or to a lesser degree.

Behaviour generator: This component is necessary for the development of this architecture since it has to select the agent's behaviour. This behaviour is defined on the basis of the agent's beliefs. Moreover, this component responds immediately to the perceptions received of the environment.

History: This component stores the agents' interactions with the environment.

Belief generation: This component is one of the most important in the cognitive model because it is in charge of creating and storing the agent's knowledge. Moreover, it defines the agent's beliefs.

Beliefs: The beliefs module is composed of three kinds of beliefs: inherited beliefs, lessons learned and interactions. Inherited beliefs are the organization's beliefs that the agent receives. For instance: an organizational diagram of the enterprise or the philosophy of the company or community. Lessons learned are the lessons that the agent obtains while it interacts with the environment. The information about interactions can be used to establish parameters in order to know what the agent can trust (agents or knowledge sources). This module is based on the agent's interests and goals, because each time a goal is realized, the lessons and experiences generated to attain that goal are introduced into the agent's beliefs as lessons learned.

2.2 Deliberative Architecture

This architecture was designed to the deliberative level of the agent (see Figure 1).

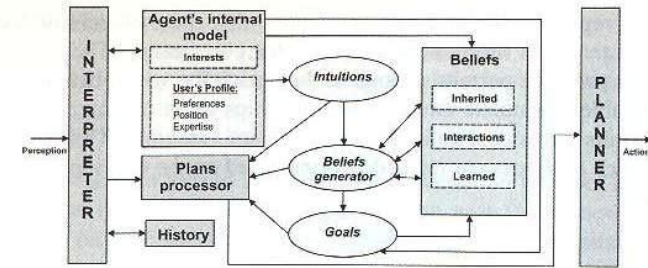


Fig. 1. Deliberative architecture

Its components are:

Agent's internal model: this module is the same as that which is described in the reactive architecture. It is composed of interests and of the user's profile.

Plans processor: This module is the most important in this architecture as it is in charge of evaluating beliefs and goals in order to determine which plans have to be included in the Planner to be executed.

Belief generator: As in the previous architecture, this component is in charge of creating, storing and retaining the agent's knowledge. In addition, it is also in charge of establishing the agent's beliefs. The belief creation process is a continuous process that is initiated at the moment at which the agent is created and which continues during its entire effective life.

Intuitions: Intuitions are hypothesis that have not been verified but which the agent believes to be true. According to [12] intuition has not yet been modeled by agent systems. In this work we have attempted to adapt this concept as we consider that people in real communities are influenced by their intuitions when they have to make a decision or believe in something. This concept is emulated by comparing the agents' profiles in order to obtain an initial value of intuition that can be used to form a belief about an agent.

History: This component stores the agents' interactions with the environment.

Goals: The goals are formed by using the agent's objectives. For instance, one of the goals of each member of a community of practice is knowledge exchange. The goals are defined in accordance with the community or group in which the agent interacts.

2.3 Social Architecture

This architecture is quite similar to the deliberative architecture.

The main differences are the *Social Model* and *Social Behaviour Processor*. The first one represents the actual state of the community, the community's interests, the members' identifiers and the goals that will be proposed by the agents in order to satisfy needs or interests related to its interactions with other agents. These goals should be coherent both with the agent's beliefs and with other agents' beliefs.

The *Social Behaviour Processor* processes the opinions and beliefs of the community's members. To do this, this module needs to manage the goals, intuitions and beliefs of the community in order to make a decision.

Both models represent the opinions and beliefs that the members of a community have about an agent, and their interaction with the community. The social focus that this architecture provides permits us to give the agents the social behaviour necessary for them to be able to emulate the work relationships in an organization. In addition, this layer permits the decentralization of decision making. That is, it provides methods by which to process or make decisions based on the opinions of the members of a community.

3 Prototype

In order to test our architecture we have developed a prototype system in which a community shares knowledge. The goal of this prototype is to allow software agents to help employees to discover the information that may be useful to them, thus decreasing the overload of information that employees often have and strengthening the use of knowledge bases in enterprises. In addition, we attempt to detect and thus avoid the situation of employees storing valueless information in the knowledge base.

To design this prototype we have designed a *User Agent* and a *Manager Agent*. The former is used to represent each person that may consult or introduce knowledge in a knowledge base or in a knowledge management system. Therefore, the *User Agent* can assume three types of behavior or roles similar to the tasks that a person may carry out in a knowledge base. The User Agent plays one role or another depending upon whether the person that it represents carries out one of the following actions:

- The person contributes new knowledge to the communities in which s/he is registered. In this case the User Agent plays the role of **Provider**.
- The person uses knowledge previously stored in the community. Then, the User Agent will be considered as a **Customer**.
- The person helps other users to achieve their goals, for instance by giving an evaluation of certain knowledge. In this case the role is that of a **Partner**. So, Figure 2 shows that in community 1 there are two User Agents playing the role of Partner, one User Agent playing the role of Consumer and another being a Provider.

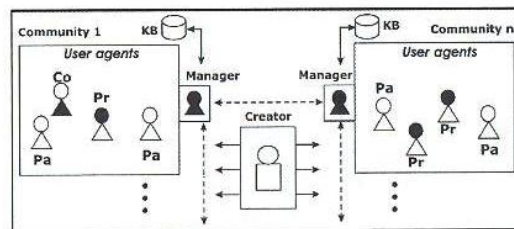


Fig. 2. Communities of agents

The second type of agent within a community is called the *Manager Agent* (represented in black in Figure 2) which must manage and control its community. In order to approach this, the agent carries out the following tasks:

- Registering an agent in its community.
- Registering the frequency of contribution of each agent.
- Registering the number of times that an agent gives feedback about other agents' knowledge.
- Registering the interactions between agents.

When a user wishes to join to a community in which no member knows anything about him/her, the reputation value assigned to the user in the new community is calculated on the basis of the reputation assigned from other communities where the user is or was a member. For instance, a User Agent called j , will ask each community manager where he/she was previously a member to consult each agent which knows him/her with the goal of calculating the average value of his/her reputation (R_j). This is calculated as:

$$R_j = \left(\sum_{i=1}^n R_{ij} \right) / n \quad (1)$$

where n is the number agents who know j and R_{ij} is the value of j 's reputation in the eyes of i . In the case of being known in several communities, the average of the values R_j will be calculated. Then, the User Agent j presents this reputation value (in a way similar to that in which a person presents his/her curriculum vitae when s/he wishes to join a company) to the Manager Agent of the community to which it is "applying". This mechanism is similar to the "word-of-mouth" propagation of information for a human [13]. We do realize that reputation is clearly a context-dependent quantity. For instance, one's reputation as a computer scientist should have no influence upon one's reputation as cook [14]. However, if we are trying to emulate the behavior of people working in communities of practice then we should emulate how some people's opinions influence others.

If any of the User Agents in the new community knows the person who wishes to join the community then his/her initial reputation value will be the average of the R_{ij} of agents who knows him/her.

R_{ij} is the value of reputation of j in the eyes of i . This value is computed as follows:

$$R_{ij} = w_e * E_j + w_p * P_j + w_i * I_j + \left(\sum_{j=1}^n QC_{ij} \right) / n \quad (2)$$

where E_j is the value of expertise which is calculated according to the degree of experience that the person upon whose behalf the agent acts has in a domain.

P_j is the value assigned to a person's position. This position is defined in the agent's internal model of the reactive architecture described in Section 2.1.

I_j is the value assigned to intuition which is calculated by comparing each user's profile. For instance, users with similar profiles (preferences) could interact more times. Intuition is an important component both in the deliberative and in the social architecture because it helps agents to create their beliefs and behavior according to their own features.

In addition, previous experience should also be calculated. We suppose that when an agent A consults information from another agent B , the agent A should evaluate how useful this information was. This value is called QC_{ij} (Quality of j 's Contribution

according to the Agent i). To attain the average value of an agent's contribution, we calculate the sum of all the values assigned to these contributions by the Agent i , for instance n and we divide it by the number of evaluations (n).

Finally, w_e , w_p and w_i are weights with which the Reputation value can be adjusted to the needs of the organizations or communities. These weights represent different values depending on the category of each employee. For instance, if an enterprise considers that all its employees have the same category, then $w_p=0$. The same could occur when the organization does not take its employee's intuitions or expertise into account.

In this way, an agent can obtain a value related to the reputation of another agent and decide to what degree it is going to consider the importance of the information obtained from this agent. Formulas (1) and (2) are processed in the social and deliberative architecture respectively.

4 Related Work

This research can be compared with other proposals that use agents and trust in knowledge exchange. For instance, in [13], the authors propose a model that allows agents to decide which agents' opinions they trust more and propose a protocol based on recommendations. This model is based on a reputation or word-of-mouth mechanism. The main problem with this approach is that every agent must keep rather complex data structures which represent a kind of global knowledge about the whole network. In [15], the authors propose a framework for exchanging knowledge in a mobile environment. They use delegate agents to be spread out into the network of a mobile community and use trust information to serve as the virtual presence of a mobile user. Another interesting work is [14] where the authors describe a trust and reputation mechanism which allows peers to discover partners who meet their individual requirements through individual experience and by sharing experiences with other peers with similar preferences. This work is focused on peer-to-peer environments.

Barber and Kim present a multi-agent belief revision algorithm based on belief networks [9]. In their model the agent is able to evaluate incoming information, to generate a consistent knowledge base, and to avoid fraudulent information from unreliable or deceptive information sources or agents. In our case, the focus is very different since it is the receiver who evaluates the relevance of a piece of knowledge rather than the provider as in Barber and Kim's proposal.

Therefore, the main difference between our work and previous works is that we take into account factors that might influence the level of trust that a person has in a piece of knowledge and in a knowledge source. Moreover, we present a general and fairly simple formula to define the reputation concept. This formula can be adapted to different settings by modifying the value of the weights. This is an important difference from other works which are focused on particular domains.

Acknowledgements

This work is partially supported by the ENIGMAS (PIB-05-058), and MECENAS (PBI06-0024) project. It is also supported by the ESFINGE project (TIN2006-15175-C05-05) Ministerio de Educación y Ciencia (Dirección General de Investigación)/Fondos Europeos de Desarrollo Regional (FEDER) in Spain.

References

1. Kautz, H.a.: Knowledge Mapping: A Technique for Identifying Knowledge Flows in Software Organizations. EuroSPI (2004)
2. Gebert, H., Geib, M., Kolbe, L.M., Brenner.: Knowledge-enabled Customer Relationship Management - Integrating Customer Relationship Management and Knowledge Management Concepts. *Journal of Knowledge Management* 8(1) (2004)
3. Malhotra, Y.: Knowledge Management and Virtual Organizations. Book Crafters, Hershey (2000)
4. Hillery, G.A.: Definitions of Community: Areas of Agreement. *Rural Sociology* 20, 118-125 (1955)
5. Geib, M., Braun, C., Kolbe, L., Brenner, W.: Measuring the Utilization of Collaboration Technology for Knowledge Development and Exchange in Virtual Communities. In: Geib, M. (ed.) 37th Hawaii International Conference on System Sciences 2004 (HICSS-37), Big Island, Hawaii, IEEE Computer Society, Los Alamitos (2004)
6. Wenger, E., McDermott, R., Snyder, W.M.: Cultivating communities of practice: a guide to managing knowledge. H.B.S. Press, Boston (2002)
7. Wooldridge, M., Ciancarini, P.: Agent-Oriented Software Engineering: The State of the Art. In: Okamoto, E., Pieprzyk, J.P., Seberry, J. (eds.) ISW 2000. LNCS, vol. 1975, Springer, Heidelberg (2000)
8. Fuentes, R., Gómez-Sanz, J., Pavón, J.: A Social Framework for Multi-agent Systems Validation and Verification. In: Wang, S., Tanaka, K., Zhou, S., Ling, T.-W., Guan, J., Yang, D.-q., Grandi, F., Mangina, E.E., Song, I.-Y., Mayr, H.C. (eds.) ER Workshops 2004. LNCS, vol. 3289, pp. 458-469. Springer, Heidelberg (2004)
9. Barber, K., Kim, J.: Belief Revision Process Based on Trust: Simulation Experiments. In: 4th Workshop on Deception, Fraud and Trust in Agent Societies, Montreal Canada (2004)
10. Ushida, H., Hirayama, Y., Nakajima, H.: Emotion Model for Life like Agent and its Evaluation. In: Proceedings of the Fifteenth National Conference on Artificial Intelligence and Tenth Innovative Applications of Artificial Intelligence Conference (AAAI'98 / IAAI'98), Madison, Wisconsin, USA (1998)
11. Wasserman, S., Glaskiewics, J.: Advances in Social Networks Analysis. Sage Publications, Thousand Oaks (1994)
12. Mui, L., Halberstadt, A., Mohtashemi, M.: Notions of Reputation in Multi-Agents Systems: A Review. In: Alonso, E., Kudenko, D., Kazakov, D. (eds.) Adaptive Agents and Multi-Agent Systems. LNCS (LNAI), vol. 2636, pp. 280-287. Springer, Heidelberg (2003)
13. Abdul-Rahman, A., Hailes, S.: Supporting Trust in Virtual Communities. In: Abdul-Rahman, A., Hailes, S. (eds.) 33rd Hawaii International Conference on Systems Sciences (HICSS'00) (2000)
14. Wang, Y., Vassileva, J.: Trust and Reputation Model in Peer-to-Peer Networks. In: Proceedings of IEEE Conference on P2P Computing, IEEE Computer Society Press, Los Alamitos (2003)
15. Schulz, S., Herrmann, K., Kalcklosch, R., Schowotzer, T.: Trust-Based Agent -Mediated Knowledge Exchange for Ubiquitous Peer Networks. In: van Elst, L., Dignum, V., Abecker, A. (eds.) AMKM 2003. LNCS (LNAI), vol. 2926, pp. 89-106. Springer, Heidelberg (2004)